



LAMP CP22



COMPACT, HIGH EFFICIENCY ENCLOSURE LAMP

Fitted with Schuko socket and switch, it can be mounted with clips on DIN rail, on a bracket (ALFASTAFF) with screws or with magnetic fixing.

It fits exactly one 19" height/unit (44 mm).



Features	Unit	LAMPCP22	LAMPSP22
Power supply	V/Hz	230/50	230/50
Schuko socket	-	Yes 6A	No
Luminosity	Lm	900	
Lamp type	-	high efficiency fluorescent lamp	
Power consumption	W	11	
Service life	hrs	5000	
Switch	-	On/Off for the lamp only	
Connection	-	3-pole terminal for 1.5 mm ² wire	
Casing	-	Aluminium profile and ABS, UL94 V0, light grey	
Protection degree EN60529	-	IP20	
Protection class	-	Class I, earthed	
Operating temperature	°C(°F)	-20/+50 (-4/+122)	
Storage temperature	°C(°F)	-45/+80 (-49/+176)	
Mounting	-	Clip on DIN rail, magnet or bracket, see ordering code below	
Installation position	-	variable	
Dimensions HxWxD	mm	95x43x268	
Weight	kg	0.76	
Package dimensions HxWxD	mm	105x58x310	
Conformity	-	CE	




Versions

Clip mounting on DIN rail	LAMPCP22+CLIP	LAMPSP22+CLIP
Magnet mounting	LAMPCP22+MAGN	LAMPSP22+MAGN
Bracket mounting	LAMPCP22+STAF	LAMPSP22+STAF

Accessories

Bracket for lamp	ALFASTAFF	ALFASTAFF
Magnet for lamp	ALFAMAGNETE	ALFAMAGNETE
Door limit switch without block	FINCOR	FINCOR
Door limit switch	FINRIP	FINRIP
Safety flashing device with lamp switch	FSL	FSL
Safety flashing device with lamp and auxiliary switches	FSLA	FSLA

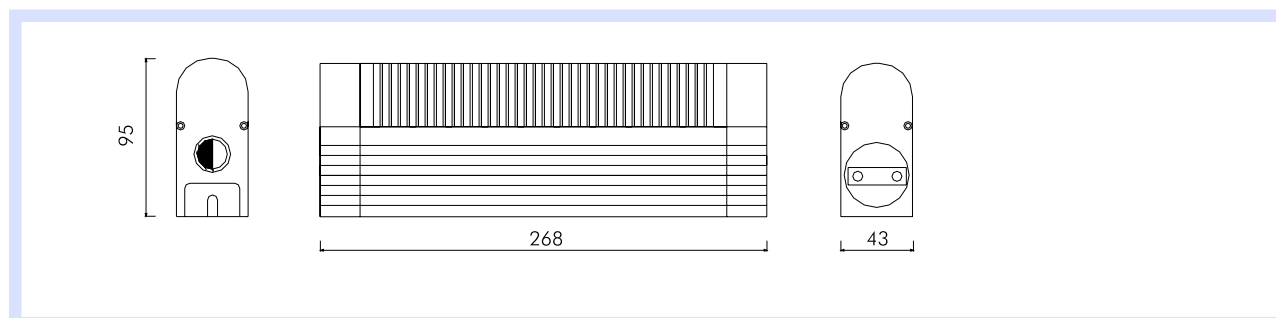

ael-cat-ep-03.10



LAMP 36

SLIM ENCLOSURE LAMP



Slim and versatile fluorescent lamp. More units can be connected together in a chain up to a total power of 100W, by using the addition interconnection cable including in the packaging.



Features	Unit	LAMP3604	LAMP3605	LAMP3606	LAMP3607	LAMP3608
Power supply	V/Hz	230/50				
Lamp type	-	T5 fluorescent lamp with integrated electronic ballast				
Power consumption	W	6	8	13	21	28
Service life	hrs	5000				
Connection	-	Plug-in cable 1.8 m long inside the package				
Series of lamps	-	Possible with male/male extension cable, max 100W total series				
Casing	-	Plastic, white				
Protection degree/class	-	IP20/Class II				
Operating temperature	°C(°F)	-20/+50 (-4/+122)				
Storage temperature	°C(°F)	-45/+80 (-49/+176)				
Mounting	-	Screws, hidden behind the lamp				
Dimensions HxWxD	mm	270x44x22	345x44x22	570x44x22	910x44x22	1210x44x22
Weight	kg	0.33	0.36	0.50	0.53	0.60
Conformity	-	CE				

Accessories

Door limit switch without block	FINCOR	FINCOR	FINCOR	FINCOR	FINCOR
Door limit switch	FINRIP	FINRIP	FINRIP	FINRIP	FINRIP
Safety flashing device with lamp switch	FSL	FSL	FSL	FSL	FSL
Safety flashing device with lamp and auxiliary switches	FSLA	FSLA	FSLA	FSLA	FSLA
Plastic bracket	STAF36	STAF36	STAF36	STAF36	STAF36

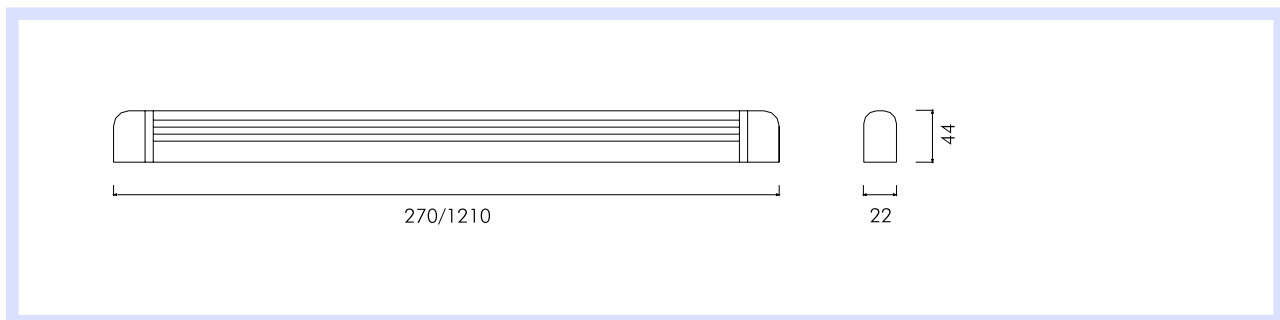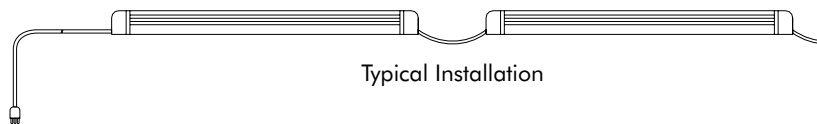



LAMP 3012


ENCLOSURE LAMP



Features	Unit	LAMP3012-10W	LAMP3012-15W	LAMP3012-18W	LAMP3012-30W
Power supply	V/Hz	230/50			
Lamp type	-	T8 fluorescent lamp with integrated electronic ballast			
Power consumption	W	10	15	18	30
Service life	hrs	5000			
Connection	-	3-pole terminal for 2.5 mm ² wire			
Casing	-	Plastic, white			
Protection degree/class	-	IP20/Class I, earthed			
Operating temperature	°C(°F)	-20/+50 (-4/+122)			
Storage temperature	°C(°F)	-45/+80 (-49/+176)			
Mounting	-	Screws, hidden behind the lamp			
Dimensions HxWxD	mm	390x62x35	490x62x35	645x62x35	950x62x35
Weight	kg	0.45	0.70	0.85	1.25
Conformity	-	CE			

Accessories

Door limit switch without block	FINCOR	FINCOR	FINCOR	FINCOR
Door limit switch	FINRIP	FINRIP	FINRIP	FINRIP
Safety flashing device with lamp switch	FSL	FSL	FSL	FSL
Safety flashing device with lamp and auxiliary switches	FSLA	FSLA	FSLA	FSLA

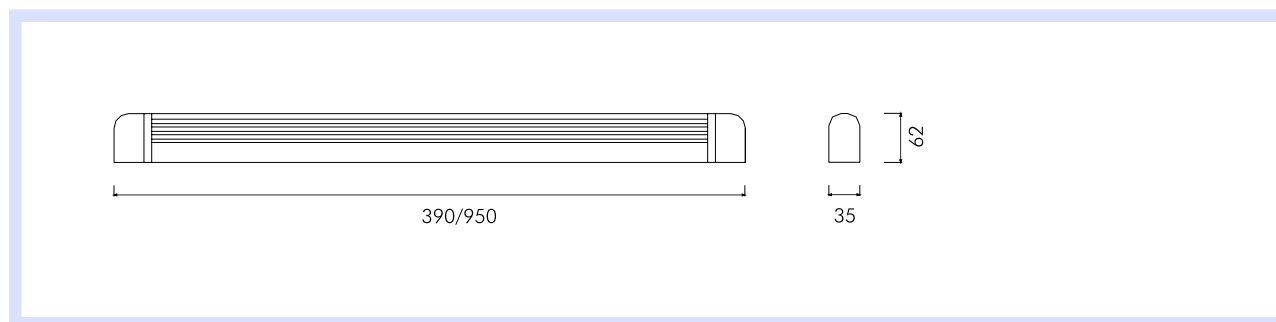

ael-cat-en-03.10



LAMP 2005



Slim and versatile fluorescent lamp. More units can be connected together in a chain up to a total power of 100W, by using the addition interconnection cable including in the packaging.



Features	Unit	LAMP2005-8W	LAMP2005-13W
Power supply	V/Hz	230/50	
Lamp type	-	T5 fluorescent lamp with integrated electronic ballast	
Power consumption	W	8	13
Service life	hrs	5000	
Connection	-	Plug-in cable 1.8 m long inside the package	
Series of lamps	-	Possible with male/male extension cable, max 100W total series	
Casing	-	Plastic, white	
Protection degree/class	-	IP20/Class II	
Operating temperature	°C(°F)	-20/+50 (-4/+122)	
Storage temperature	°C(°F)	-45/+80 (-49/+176)	
Mounting	-	Screws, hidden behind the lamp	
Dimensions HxWxD	mm	340x70x20	560x70x20
Weight	kg	0.50	0.70
Conformity	-	CE	

Accessories

Door limit switch without block	FINCOR	FINCOR
Door limit switch	FINRIP	FINRIP
Safety flashing device with lamp switch	FSL	FSL
Safety flashing device with lamp and auxiliary switches	FSLA	FSLA

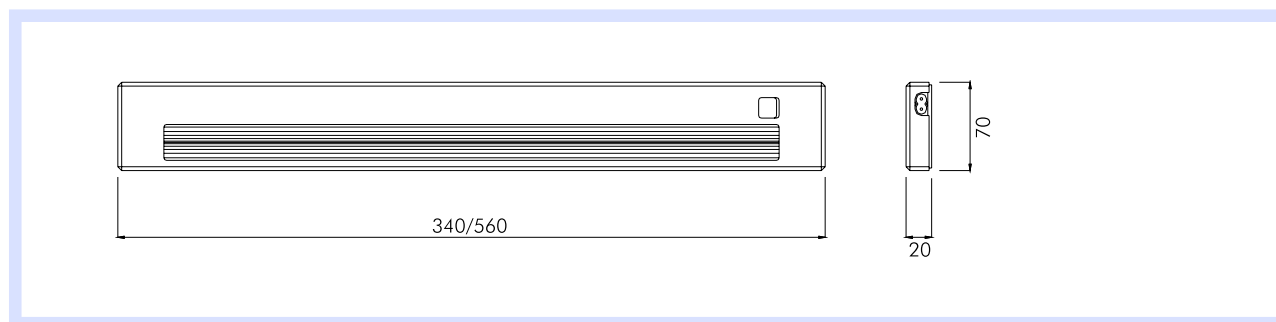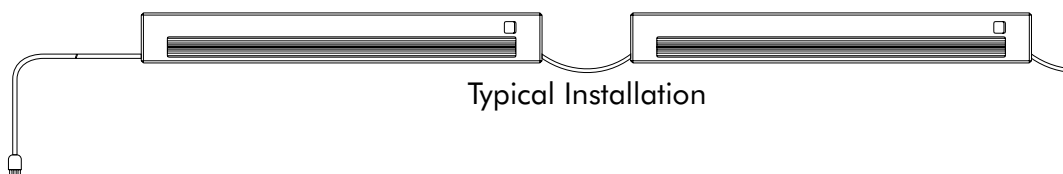

ael-cat-en-03.10