


Incremental Encoders

Standard Sine wave output, SIL3 / PLe, optical	Sendix SIL 5814FS3 / 5834FS3 (Shaft / Hollow shaft)	SinCos
---	---	--------

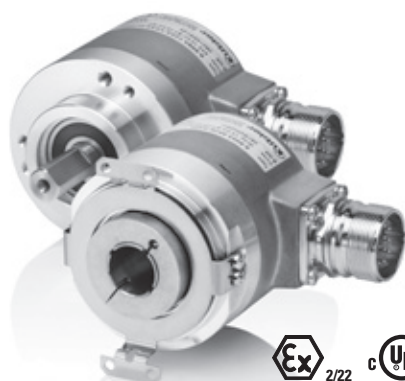

The incremental encoders 5814 FS3 and 5834 FS3 of the Sendix SIL family are suited for use in safety-related applications up to SIL3 according to EN 61800-5-2 or PLe to EN ISO 13849-1.

These encoders are particularly suited for applications in the field of safe drive technology.



Functional Safety

- Encoder with individual certificate from IFA / TÜV
- Suitable for applications up to SIL3 acc. to EN 61800-5-2
- Suitable for applications up to PLe acc. to EN ISO 13849-1
- With incremental SinCos tracks
- Certified mechanical mounting + electronic

Flexible

- Shaft and hollow shaft versions
- Cable and connector variants
- Various mounting options available

Order code	8.5814FS3	Type	1	X	X	X	XXXX
Shaft version			a	b	c	d	e

If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces.
Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.



a Flange

1 = clamping flange, IP65, ø 58 mm [2.28"]

b Shaft (ø x L)

2 = 10 x 20 mm [0.39 x 0.79"], with flat
A = 10 x 20 mm [0.39 x 0.79"], with feather key

c Output circuit / Power supply

1 = SinCos / 5 V DC
2 = SinCos / 10 ... 30 V DC

e Pulse rate

1024, 2048

d Type of connection

1 = axial cable, 1 m [3.28'] PVC
2 = radial cable, 1 m [3.28'] PVC
3 = M23 connector, 12 pin, axial
4 = M23 connector, 12 pin, radial
5 = M12 connector, 8 pin, axial
6 = M12 connector, 8 pin, radial

optional on request
- special cable length
- Ex 2/22

Order code	8.5834FS3	Type	X	X	X	X	XXXX
Hollow shaft			a	b	c	d	e

If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces.
Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.



a Flange

A = with torque stop set, IP65
B = with stator coupling, IP65, ø 63 mm [2.48"]

b Hollow shaft

3 = ø 10 mm [0.39"]
4 = ø 12 mm [0.47"]
5 = ø 14 mm [0.55"]
K = ø 10 mm [0.39"], tapered shaft

c Output circuit / Power supply

1 = SinCos / 5 V DC
2 = SinCos / 10 ... 30 V DC

e Pulse rate

1024, 2048

d Type of connection

2 = radial cable, 1 m [3.28'] PVC
E = tangential cable, 1 m [3.28'] PVC
4 = M23 connector, 12 pin, radial
6 = M12 connector, 8 pin, radial

optional on request
- special cable length
- Ex 2/22

Incremental Encoders

Standard Sine wave output, SIL3 / PLe, optical	Sendix SIL 5814FS3 / 5834FS3 (Shaft / Hollow shaft)	SinCos
Accessories – Safety control		Order-No.
Safety-M, basic modules	Speed monitoring for 1 axis	8.MS1.000
	Speed monitoring for 2 axes (analogue inputs optional)	8.MS2.XXX
Connection technology		
Connector, self-assembly (straight)	M12 female connector with coupling nut	05.CMB 8181-0
	M23 female connector with coupling nut	8.0000.5012.0000
	M23 female connector with coupling nut, Ex zone 2/22	8.0000.5012.0000.Ex
Cordset, pre-assembled	M12 female connector with coupling nut, 2 m [6.56'] PVC cable	05.00.6041.8211.002M
	M23 female connector with coupling nut, 2 m [6.56'] PVC cable	8.0000.6901.0002

Further accessories can be found in the accessories section or in the accessories area of our website at: www.kuebler.com/accessories
 Additional connectors can be found in the connection technology section or in the connection technology area of our website at: www.kuebler.com/connection_technology
 You will find an overview of our systems and components for Functional Safety in the safety technology section or under www.kuebler.com/safety

Technical data

Notes regarding "Functional Safety"	
These encoders are suitable for use in safety-related systems up to SIL3 acc. to EN 61800-5-2 and PLe to EN ISO 13849-1 in conjunction with controllers or evaluation units, which possess the necessary functionality.	
Additional functions can be found in the operating manual.	

Safety characteristics	
Relevant standards	EN ISO 13849-1 / EN 61800-5-2, EN 61508
Classification	PLe / SIL3
System structure	2 channel (Cat. 4 / HFT = 1)
PFH_d value¹⁾	1.09 x 10 ⁻⁸ h ⁻¹
Proof-test interval	20 years

Mechanical characteristics		
Max. speed, shaft version	up to 70°C	12 000 min ⁻¹ , 10 000 min ⁻¹ (continuous)
	up to T _{max}	8 000 min ⁻¹ , 5 000 min ⁻¹ (continuous)
Max. speed, hollow shaft version	up to 70°C	9 000 min ⁻¹ , 6 000 min ⁻¹ (continuous)
	up to T _{max}	6 000 min ⁻¹ , 3 000 min ⁻¹ (continuous)
Starting torque – at 20°C [68°F]		
	shaft version	< 0.01 Nm
	hollow shaft version	< 0.03 Nm
Moment of inertia		
	shaft version	4.0 x 10 ⁻⁶ kgm ²
	hollow shaft version	7.0 x 10 ⁻⁶ kgm ²
Load capacity of shaft	radial	80 N
	axial	40 N
Weight	approx. 0.45 kg [15.87 oz]	
Protection acc. to EN 60529		
	housing side	IP67
	shaft side	IP65
EX approval for hazardous areas		optional zone 2 and 22
Working temperature range		-40°C ... +90°C [-40°F ... +194°F] ²⁾
Materials	shaft / hollow shaft	stainless steel
	flange	aluminium
	housing	zinc die-cast housing
	cable	PVC
Shock resistance acc. EN 60068-2-27		500 m/s ² , 11 ms
Vibration resistance acc. EN 60068-2-6		200 m/s ² , 10 ... 150 Hz

Electrical characteristics	
Power supply	5 V DC ± 5% or 10 ... 30 V DC
Power consumption (no load)	5 V DC max. 70 mA
	10 ... 30 V DC max. 45 mA
Reverse polarity protection of the power supply (+V)	yes
UL approval	File 224618
CE compliant acc. to	EMC guideline 2004/108/EC Machinery directive 2006/42/EC
RoHS compliant acc. to	guideline 2002/95/EC

SinCos interface	
Max. frequency -3dB	400 kHz
Signal level	1 V _{pp} (± 10%)
Short circuit proof	yes ³⁾
Pulse rate	1024 / 2048 ppr

- 1) The specified value is based on a diagnostic coverage of 99%, that must be achieved with an encoder evaluation unit.
 The encoder evaluation unit must meet at least the requirements for SIL3.
 2) Cable version: -30°C ... +90°C [-22°F ... +194°F] fixed installation
 3) Short circuit to 0V or to output, one channel at a time, supply voltage correctly applied

Incremental Encoders

Standard
Sine wave output, SIL3 / PLe, optical

Sendix SIL 5814FS3 / 5834FS3 (Shaft / Hollow shaft)

SinCos

Terminal assignment

Output circuit	Type of connection	Cable (isolate unused wires individually before initial start-up)							
1, 2	1, 2, E	Signal:	0 V	+V	A	$\bar{A}$	B	$\bar{B}$	$\perp$
		Cable colour:	WH	BN	GN	YE	GY	PK	shield

Output circuit	Type of connection	M23 connector, 12-pin							
1, 2	3, 4	Signal:	0 V	+V	A	$\bar{A}$	B	$\bar{B}$	$\perp$
		Pin:	10	12	5	6	8	1	PH ¹⁾


Output circuit	Type of connection	M12 connector, 8-pin							
1, 2	5, 6	Signal:	0 V	+V	A	$\bar{A}$	B	$\bar{B}$	$\perp$
		Pin:	1	2	3	4	5	6	PH ¹⁾

+V: Encoder power supply +V DC
 0 V: Encoder power supply ground GND (0 V)
 A, $\bar{A}$: Cosine signal
 B, $\bar{B}$: Sine signal
 PH $\perp$: Plug connector housing (Shield)

Top view of mating side, male contact base



M12 connector, 8-pin



M23 connector, 12-pin

1) PH = shield is attached to connector housing

Incremental Encoders

Standard

Sine wave output, SIL3 / PLe, optical

Sendix SIL 5814FS3 / 5834FS3 (Shaft / Hollow shaft)

SinCos

Dimensions shaft version

Dimensions in mm [inch]

Clamping flange, $\varnothing 58$ [2.28]


Flange type 1 with shaft type 2

(Drawing with cable)

1 3 x M3, 6 [0.24] deep

2 3 x M4, 8 [0.32] deep

D = 10 ^{h7} [0.39]

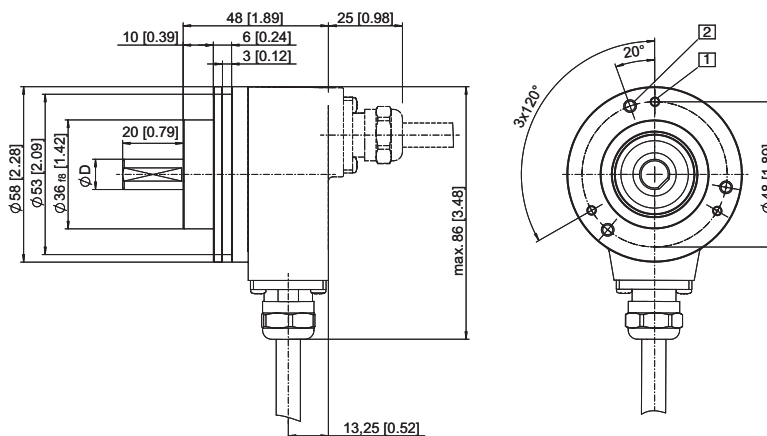

Clamping flange, $\varnothing 58$ [2.28]

Flange type 1 with shaft type A


(Drawing with M23 connector)

1 3 x M3, 6 [0.24] deep

2 3 x M4, 8 [0.32] deep

3 Feather key DIN 6885 - A - 3x3x6

D = 10 ^{h7} [0.39]

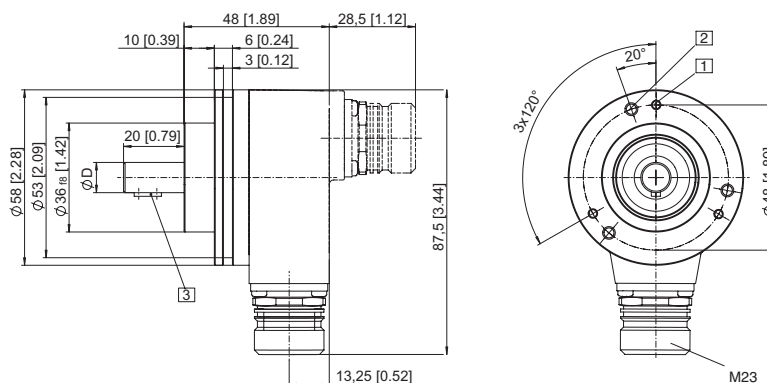


(Drawing with M12 connector)

1 3 x M3, 6 [0.24] deep

2 3 x M4, 8 [0.32] deep

3 Feather key DIN 6885 - A - 3x3x6

D = 10 mm ^{h7} [0.39]

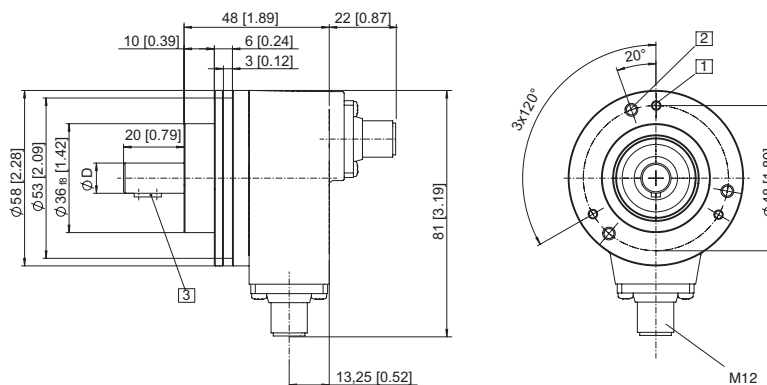

Incremental Encoders

Standard

Sine wave output, SIL3 / PLe, optical

Sendix SIL 5814FS3 / 5834FS3 (Shaft / Hollow shaft)

SinCos

Dimensions hollow shaft version

Dimensions in mm [inch]


Flange with torque stop set

Flange type A

(Drawing with cable)

- 1 SW 3,
recommended torque for the
clamping ring 2.5 Nm


D = $\emptyset 10^{H7}$ [0.39]
 $\emptyset 12^{H7}$ [0.47]
 $\emptyset 14^{H7}$ [0.55]

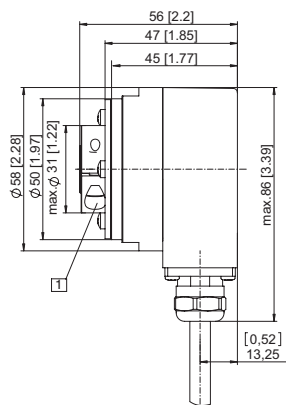




(Drawing with M12 connector)

- 1 SW 3,
recommended torque for the
clamping ring 2.5 Nm

D = $\emptyset 10^{H7}$ [0.39]
 $\emptyset 12^{H7}$ [0.47]
 $\emptyset 14^{H7}$ [0.55]

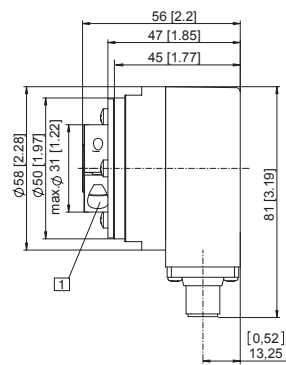

Torque pin with rectangular sleeve
with M4 thread, 10 [0.39] deep

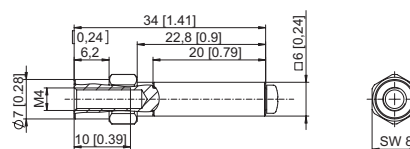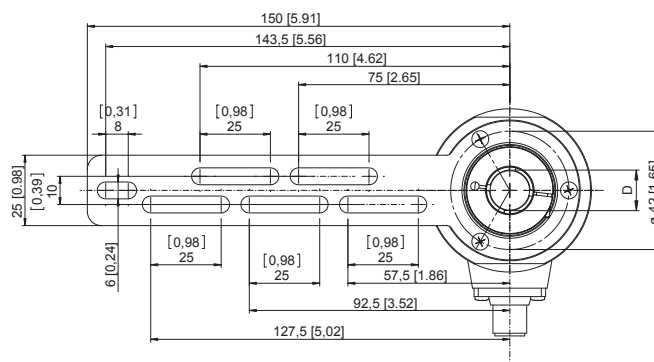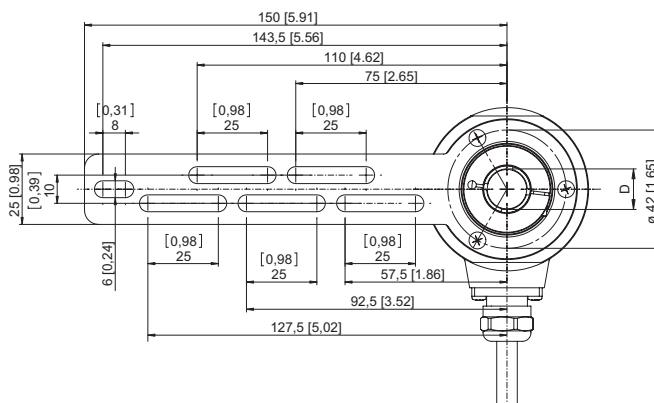


Flange with stator coupling, ø 63 [2.48] and hollow shaft

Flange type B

(Drawing with M23 connector)

- 1 SW 3,
recommended torque for the
clamping ring 2.5 Nm

2 for (4x) M3 screw
D = $\varnothing 10^{H7}$ [0.39]
 $\varnothing 12^{H7}$ [0.47]
 $\varnothing 14^{H7}$ [0.55]

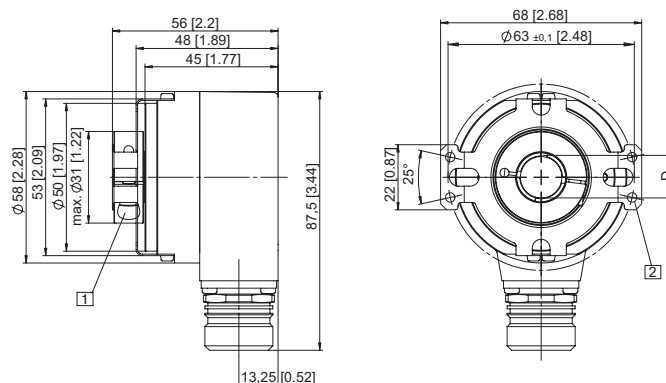

Flange with stator coupling, ø 63 [2.48]

and tapered shaft

Flange type B
(Drawing with tangential cable outlet)

- 1 for (4x) M3 screw
- 2 Status LED
- 3 SET button
- 4 SW 4

