


Absolute Encoders - Singleturn

Standard
SIL2/PLd, optical

Sendix SIL 5853FS2 / 5873FS2 (Shaft / Hollow shaft)

SSI/BiSS-C + SinCos

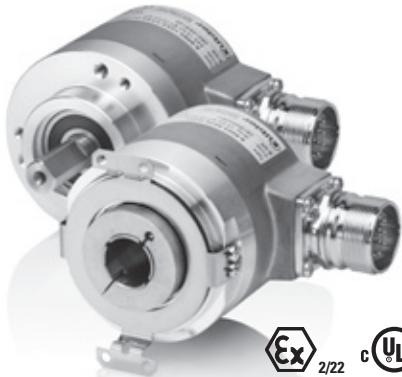

SIL2
Functional Safety
PLd



The absolute singleturn encoders 5853FS2 and 5873FS2 of the Sendix SIL family are suited for use in safety-related applications up to SIL2 according to EN 61800-5-2 or PLd to EN ISO 13849-1.

The extra strong Safety-Lock™ Design interlocked bearings, the high integration density of the components based on OptoASIC technology and the rugged die-cast housing make these devices ideal also for demanding applications outdoors up to IP67.



ssi **BiSS**
INTERFACE



Functional Safety

- Encoder with individual certificate from IFA / TÜV
- Suitable for applications up to SIL2 acc. to EN 61800-5-2
- Suitable for applications up to PLd acc. to EN ISO 13849-1
- SSI or BiSS-C interface with incremental SinCos tracks with 2048 ppr
- Certified mechanical mounting + electronic

Flexible

- Shaft and hollow shaft versions
- Cable and connector variants
- Various mounting options available

Order code
Shaft version

8.5853FS2 . 1|X|X|X . X|X|2|X
Type (a)(b)(c)(d) (e)(f)(g)(h)

If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces.

Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.



a Flange

1 = clamping flange, IP65, ø 58 mm [2.28"]

d Type of connection

1 = axial cable, 1 m [3.28'] PVC

i Resolution ¹⁾

A = 10 bit ST

b Shaft (ø x L)

2 = 10 x 20 mm [0.39 x 0.79"], with flat

2 = radial cable, 1 m [3.28'] PVC

1 = 11 bit ST

A = 10 x 20 mm [0.39 x 0.79"], with feather key

3 = M23 connector, 12 pin, axial

2 = 12 bit ST

c Interface / Power supply

3 = SSI or BiSS-C + 2048 ppr SinCos / 5 V DC

e Code

B = SSI, Binary

4 = SSI or BiSS-C + 2048 ppr SinCos / 10 ... 30 V DC

C = BiSS-C, Binary

G = SSI, Gray

h Options (Service)

1 = no option

2 = Status LED

3 = SET button and status LED

optional on request

- special cable length

- Ex 2/22

Order code
Hollow shaft

8.5873FS2 . X|X|X|X . X|X|2|X
Type (a)(b)(c)(d) (e)(f)(g)(h)

If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces.

Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.



a Flange

A = with torque stop set, IP65

B = with stator coupling, IP65, ø 63 mm [2.48"]

d Type of connection

2 = radial cable, 1 m [3.28'] PVC

i Resolution ¹⁾

A = 10 bit ST

b Hollow shaft

3 = ø 10 mm [0.39"]

4 = ø 12 mm [0.47"]

5 = ø 14 mm [0.55"]

K = ø 10 mm [0.39"], tapered shaft

e Code

B = SSI, Binary

C = BiSS-C, Binary

G = SSI, Gray

h Options (Service)

1 = no option

2 = Status LED

3 = SET button and status LED

c Interface / Power supply

3 = SSI or BiSS-C + 2048 ppr SinCos / 5 V DC

4 = SSI or BiSS-C + 2048 ppr SinCos / 10 ... 30 V DC

1 = 11 bit ST

2 = 12 bit ST

3 = 13 bit ST

4 = 14 bit ST

7 = 17 bit ST

g Input / output ¹⁾

2 = SET, DIR input

optional on request

- special cable length

- Ex 2/22

1) Resolution, preset value and count direction are factory-programmable

Absolute Encoders - Singleturn

Standard SIL2/PLd, optical	Sendix SIL 5853FS2 / 5873FS2 (Shaft / Hollow shaft)	SSI/BiSS-C+SinCos
Accessory safety technology		
Safety-M, basic modules	speed / position monitoring for 1 axis speed / position monitoring for 2 axes (analogue inputs optional)	8.MSP1.000 8.MSP2.XXX
Connection technology		
Connector, self-assembly (straight)	M23 female connector with coupling M23 female connector with coupling, Ex zone 2/22	8.0000.5012.0000 8.0000.5012.0000.Ex
Cordset, pre-assembled	M23 female connector with coupling nut, 2 m [2.19'] PVC cable	8.0000.6901.0002.0031

Further accessories can be found in the accessories section or in the accessories area of our website at: www.kuebler.com/accessories
 Additional connectors can be found in the connection technology section or in the connection technology area of our website at: www.kuebler.com/connection_technology
 You will find an overview of our systems and components for functional safety under www.kuebler.com/safety

Technical data

Notes regarding "Functional Safety"

These encoders are suitable for use in safety-related systems up to SIL2 acc. to EN 61800-5-2 and PLd to EN ISO 13849-1 in conjunction with controllers or evaluation units, which possess the necessary functionality.

Additional functions can be found in the operating manual.

Electrical characteristics

Power supply	5 V DC \pm 5% or 10 ... 30 V DC	
Current consumption (no load)	5 V DC 10 ... 30 V DC	max. 70 mA max. 45 mA
Reverse polarity protection of the power supply (+V)	yes	
Short circuit proof outputs	yes ³⁾	
UL approval	File 224618	
CE compliant acc. to	EMC guideline 2004/108/EC Machinery directive 2006/42/EC	
RoHS compliant acc. to	guideline 2002/95/EC	

Safety characteristics

Relevant standards	EN ISO 13849-1 / EN 61800-5-2, EN 61508
Classification	PLd / SIL2
System structure	2 channel (Cat. 3 / HFT = 1)
PFH_d value¹⁾	$2.16 \times 10^{-8} \text{ h}^{-1}$
Proof-test interval	20 years

Mechanical characteristics

Max. speed, shaft version	up to 70°C [158°F] 12 000 min ⁻¹ , 10 000 min ⁻¹ (continuous) up to T _{max} 8 000 min ⁻¹ , 5 000 min ⁻¹ (continuous)
Max. speed, hollow shaft version	up to 70°C [158°F] 9 000 min ⁻¹ , 6 000 min ⁻¹ (continuous) up to T _{max} 6 000 min ⁻¹ , 3 000 min ⁻¹ (continuous)
Starting torque - at 20°C [68°F]	shaft version < 0.01 Nm hollow shaft version < 0.03 Nm
Moment of inertia	shaft version $4.0 \times 10^{-6} \text{ kgm}^2$ hollow shaft version $7.0 \times 10^{-6} \text{ kgm}^2$
Load capacity of shaft	radial 80 N axial 40 N
Weight	approx. 0.45 kg [15.87 oz]
Protection acc. to EN 60529	housing side IP67 shaft side IP65
Working temperature range	-40°C ... +90°C ²⁾ [-40°F ... +194°F] ²⁾
Material	shaft / hollow shaft stainless steel flange aluminium housing zinc die-cast housing cable PVC
Shock resistance acc. EN 60068-2-27	500 m/s ² , 11 ms
Vibration resistance acc. EN 60068-2-6	200 m/s ² , 10 ... 150 Hz

1) The specified value is based on a diagnostic coverage of 90%, that must be achieved with an encoder evaluation unit.

The encoder evaluation unit must meet at least the requirements for SIL2.

2) Cable version: -30 °C ... +90 °C [-22 °F ... +194 °F]

3) Short circuit to 0 V or to output, one channel at a time, power supply correctly applied

Absolute Encoders - Singleturn

Standard SIL2/PLd, optical	Sendix SIL 5853FS2 / 5873FS2 (Shaft / Hollow shaft)	SSI/BiSS-C + SinCos
SSI interface		
Output driver RS485 transceiver type		
Permissible load / channel max. 20 mA		
Signal level HIGH typ 3.8 V LOW at $I_{Load} = 20$ mA typ 1.3 V		
Singletturn resolution 10 ... 14 bit and 17 bit ¹⁾		
Code Binary or gray		
SSI clock rate resolution \leq 14 bit 50 kHz ... 2 MHz resolution \geq 15 bit 50 kHz ... 125 kHz		
Monoflop time ≤ 15 μ s		
Note: If the clock starts cycling within the monoflop time, a second data transfer starts with the same data. If the clock starts cycling after the monoflop time, the data transfer starts with the new values. The update rate is dependent on the clock speed, data length and monoflop-time.		
Data refresh rate resolution \leq 14 bit ≤ 1 μ s resolution \geq 15 bit 4 μ s		
Status and parity bit on request		
BiSS-C interface		
Resolution singletturn 10 ... 14 bit and 17 bit ¹⁾		
Code Binary		
Clock rate up to 10 MHz		
Max. update rate < 10 μ s, depends on the clock rate and the data length		
Data refresh rate ≤ 1 μ s		
Note: - Bidirectional, factory programmable parameters are: resolution, code, direction, alarms and warnings - CRC data verification		
SinCos interface		
Max. frequency -3dB 400 kHz		
Signal level 1 Vpp ($\pm 10\%$)		
Short circuit proof yes		
Pulse rate 2048 ppr		
SET input or SET button		
Input active HIGH		
Input type comparator		
Signal level HIGH min: 60 % of +V, max: +V LOW max: 25 % of +V (Power supply)		
Input current < 0.5 mA		
Min. pulse duration (SET) 10 ms		
Timeout after SET signal 14 ms		
Reaction time (DIR input) 1 ms		
The encoder can be set to zero at any position by means of a HIGH signal on the SET input or by pressing the optional SET button (with a pencil, ball-point pen or similar). Other preset values can be factory-programmed. The SET input has a signal delay time of approx. 1 ms. Once the SET function has been triggered, the encoder requires an internal processing time of approx. 15 ms before the new position data can be read. During this time the LED is ON.		
DIR input		
A HIGH signal switches the direction of rotation from the default CW to CCW. This function can also be factory-programmed to be inverted. If DIR is changed when the device is already switched on, then this will be interpreted as an error. The LED will come ON and the status output will switch to LOW.		
Power-on delay		
After Power-ON the encoder requires a time of approx. 150 ms before valid data can be read.		
LED		
The optional LED (red) serves to display various alarm or error messages. In normal operation the LED is OFF.		
If the LED is ON this indicates: - Sensor error, singletturn or multturn (soiling, glass breakage etc.) - LED error, failure or ageing - Over- or under-temperature		
In the SSI mode, the fault indication can only be reset by switching off the power supply to the device.		

Terminal assignment

Interface	Type of connection	Cable (isolate unused wires individually before initial start-up)													
3, 4	1, 2, E	Signal: 0 V +V C+ C- D+ D- SET DIR A \bar{A} B \bar{B} \pm													
		Cable colour: WH BN GN YE GY PK BU RD BK VT GY-PK RD-BU shield													
Interface	Type of connection	M23 connector, 12-pin													
3, 4	3, 4	Signal: 0 V +V C+ C- D+ D- SET DIR A \bar{A} B \bar{B} \pm													
		Pin: 1 2 3 4 5 6 7 8 9 10 11 12 PH													

+V: Encoder power supply +V DC

0 V: Encoder power supply ground GND (0 V)

C+, C-: Clock signal

D+, D-: Data signal

SET: Set input. The current position becomes defined as position zero.


DIR: Direction input: If this input is active, output values are counted backwards (decrease) when the shaft is turning clockwise.

A, \bar{A} : cosine signal

B, \bar{B} : sine signal

PH \pm : Plug connector housing (shield)

Top view of mating side, male contact base



M23 connector, 12-pin

1) Other options on request

Absolute Encoders - Singleturn

Standard
SIL2/PLd, optical

Sendix SIL 5853FS2 / 5873FS2 (Shaft / Hollow shaft)

SSI / BiSS-C + SinCos



Dimensions shaft version

Dimensions in mm [inch]

Clamping flange, \varnothing 58 [2.28]

Flange type 1 with shaft type 2
(Drawing with cable)



- [1] 3 x M3, 6 [0.24] deep
- [2] 3 x M4, 8 [0.32] deep
- D = 10^{h7} [0.39]

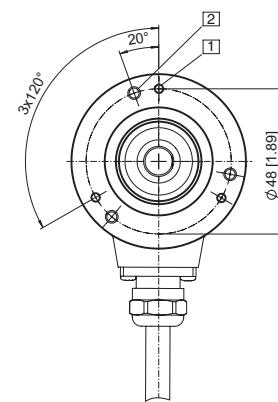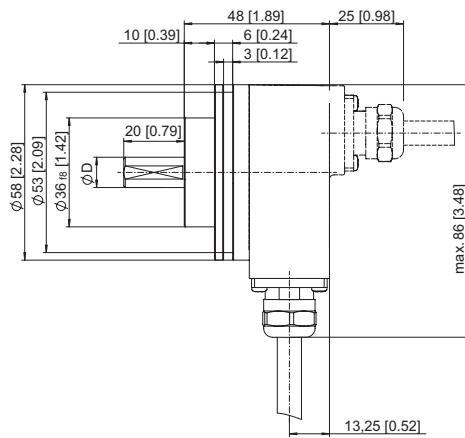

Clamping flange, \varnothing 58 [2.28]

Flange type 1 with shaft type A
(Drawing with M23 connector)

- [1] 3 x M3, 6 [0.24] deep
- [2] 3 x M4, 8 [0.32] deep
- [3] Feather key DIN 6885 - A - 3x3x6
- D = 10^{h7} [0.39]

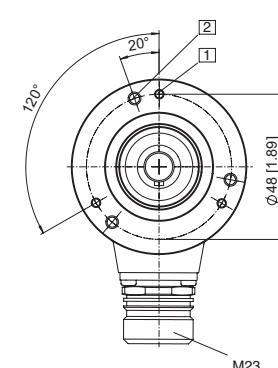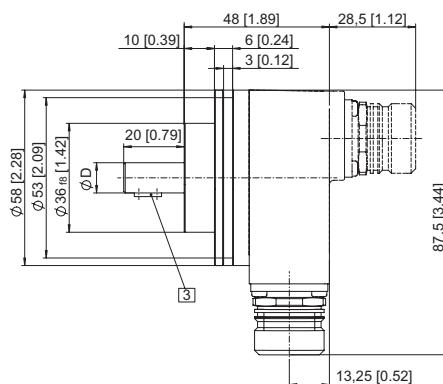

Absolute Encoders - Singleturn

Standard
SIL2/PLd, optical

Sendix SIL 5853FS2 / 5873FS2 (Shaft / Hollow shaft)

SSI/BiSS-C + SinCos

Dimensions hollow shaft version

Dimensions in mm [inch]

Flange with torque stop set

Flange type A



(Drawing with cable)

[1] SW 3, recommended torque for the clamping ring 2.5 Nm


$D = \phi 10^H7$ [0.39]

$\phi 12^H7$ [0.47]

$\phi 14^H7$ [0.55]

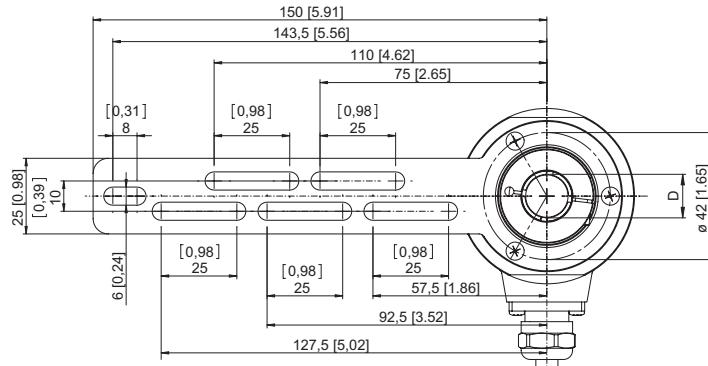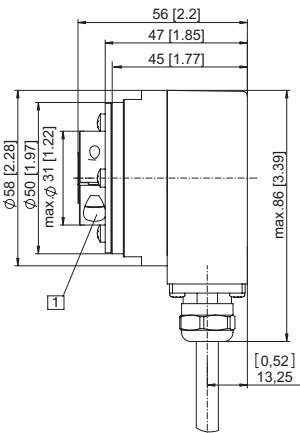

Torque pin with rectangular sleeve with M4 thread, 10 [0.39] deep

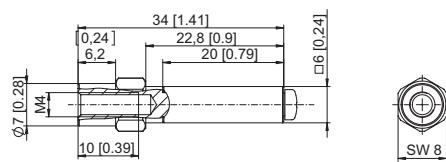

Flange with stator coupling, $\phi 63$ [2.48] and hollow shaft

Flange type B

(Drawing with M23 connector)


[1] SW 3, recommended torque for the clamping ring 2.5 Nm

[2] for (4x) M3 screw

$D = \phi 10^H7$ [0.39]

$\phi 12^H7$ [0.47]

$\phi 14^H7$ [0.55]

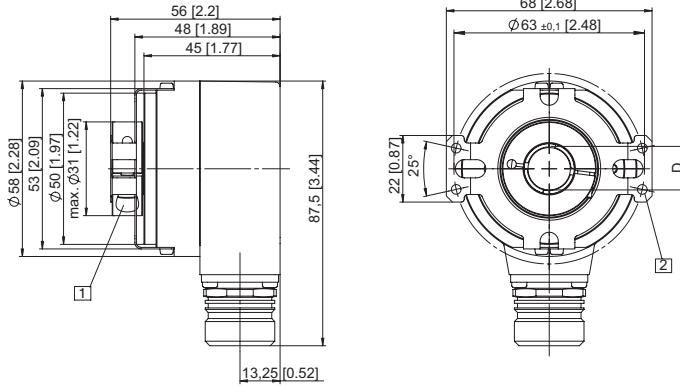

Flange with stator coupling, $\phi 63$ [2.48] and tapered shaft

Flange type B

(Drawing with tangential cable outlet)

[1] for (4x) M3 screw

[2] Status LED

[3] SET button

[4] SW 4

