


Incremental Encoders

Standard

Sine wave output, SIL2 / PLd, optical

Sendix SIL 5814FS2 / 5834FS2 (Shaft / Hollow shaft)

SinCos

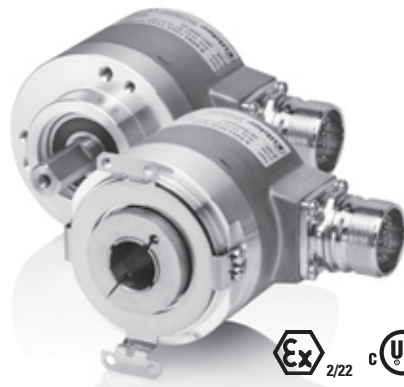

The incremental encoders 5814 FS2 and 5834 FS2 of the Sendix SIL family are suited for use in safety-related applications up to SIL2 according to EN 61800-5-2 or PLd according to EN ISO 13849-1.


These encoders are particularly suited for applications in the field of safe drive technology.



Safety-Lock™



High rotational speed



Temperature range



High protection level



High shaft load capacity




Shock / vibration resistant



Magnetic field proof



Reverse polarity protection



SinCos



Optical sensor

Functional Safety

- Encoder with individual certificate from IFA / TÜV
- Suitable for applications up to SIL2 acc. to EN 61800-5-2
- Suitable for applications up to PLd acc. to EN ISO 13849-1
- With incremental SinCos tracks
- Certified mechanical mounting + electronic

Flexible

- Shaft and hollow shaft versions
- Cable and connector variants
- Various mounting options available

Order code Shaft version

8.5814FS2 . 1XXX . XXXX
Type a b c d e

If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces. Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.



a Flange

1 = clamping flange, IP65, ø 58 mm [2.28"]

b Shaft (ø x L)

2 = 10 x 20 mm [0.39 x 0.79"], with flat

A = 10 x 20 mm [0.39 x 0.79"], with feather key

c Output circuit / Power supply

1 = SinCos / 5 V DC

2 = SinCos / 10 ... 30 V DC

e Pulse rate

1024, 2048

d Type of connection

1 = axial cable, 1 m [3.28'] PVC

2 = radial cable, 1 m [3.28'] PVC

3 = M23 connector, 12 pin, axial

4 = M23 connector, 12 pin, radial

5 = M12 connector, 8 pin, axial

6 = M12 connector, 8 pin, radial

optional on request

- special cable length

- Ex 2/22

Order code Hollow shaft

8.5834FS2 . XXXX . XXXX
Type a b c d e

If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces. Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.



a Flange

A = with torque stop set, IP65

B = with stator coupling, IP65, ø 63 mm [2.48"]

c Output circuit / Power supply

1 = SinCos / 5 V DC

2 = SinCos / 10 ... 30 V DC

e Pulse rate

1024, 2048

b Hollow shaft

3 = ø 10 mm [0.39"]

4 = ø 12 mm [0.47"]

5 = ø 14 mm [0.55"]

K = ø 10 mm [0.39"], tapered shaft

d Type of connection

2 = radial cable, 1 m [3.28'] PVC

E = tangential cable, 1 m [3.28'] PVC

4 = M23 connector, 12 pin, radial

6 = M12 connector, 8 pin, radial

optional on request

- special cable length

- Ex 2/22

Incremental Encoders

| Standard Sine wave output, SIL2 / PLd, optical | | Sendix SIL 5814FS2 / 5834FS2 (Shaft / Hollow shaft) | SinCos |
|---|---|---|----------------------|
| Accessories – Safety control | | | Order-No. |
| Safety-M, basic modules | Speed monitoring for 1 axis | | 8.MS1.000 |
| | Speed monitoring for 2 axes (analogue inputs optional) | | 8.MS2.XXX |
| Connection technology | | | |
| Connector, self-assembly (straight) | M12 female connector with coupling nut | | 05.CMB 8181-0 |
| | M23 female connector with coupling nut | | 8.0000.5012.0000 |
| | M23 female connector with coupling nut, Ex zone 2/22 | | 8.0000.5012.0000.Ex |
| Cordset, pre-assembled | M12 female connector with coupling nut, 2 m [6.56'] PVC cable | | 05.00.6041.8211.002M |
| | M23 female connector with coupling nut, 2 m [6.56'] PVC cable | | 8.0000.6901.0002 |

Further accessories can be found in the accessories section or in the accessories area of our website at: www.kuebler.com/accessories
 Additional connectors can be found in the connection technology section or in the connection technology area of our website at: www.kuebler.com/connection_technology
 You will find an overview of our systems and components for Functional Safety in the safety technology section or under www.kuebler.com/safety

Technical data

Notes regarding “Functional Safety”

These encoders are suitable for use in safety-related systems up to SIL2 acc. to EN 61800-5-2 and PLd to EN ISO 13849-1 in conjunction with controllers or evaluation units, which possess the necessary functionality.
Additional functions can be found in the operating manual.

Safety characteristics

| | |
|--------------------------------------|---|
| Relevant standards | EN ISO 13849-1 / EN 61800-5-2, EN 61508 |
| Classification | PLd / SIL2 |
| System structure | 2 channel (Cat. 3 / HFT = 1) |
| PFH _d value ¹⁾ | 2.16 x 10 ⁻⁸ h ⁻¹ |
| Proof-test interval | 20 years |

Mechanical characteristics

| | | |
|--|------------------------|--|
| Max. speed, shaft version | up to 70°C | 12 000 min ⁻¹ , 10 000 min ⁻¹ (continuous) |
| | up to T _{max} | 8 000 min ⁻¹ , 5 000 min ⁻¹ (continuous) |
| Max. speed, hollow shaft version | up to 70°C | 9 000 min ⁻¹ , 6 000 min ⁻¹ (continuous) |
| | up to T _{max} | 6 000 min ⁻¹ , 3 000 min ⁻¹ (continuous) |
| Starting torque – at 20°C [68°F] | | |
| | shaft version | < 0.01 Nm |
| | hollow shaft version | < 0.03 Nm |
| Moment of inertia | | |
| | shaft version | 4.0 x 10 ⁻⁶ kgm ² |
| | hollow shaft version | 7.0 x 10 ⁻⁶ kgm ² |
| Load capacity of shaft | radial | 80 N |
| | axial | 40 N |
| Weight | | approx. 0.45 kg [15.87 oz] |
| Protection acc. to EN 60529 | | |
| | housing side | IP67 |
| | shaft side | IP65 |
| EX approval for hazardous areas | | optional zone 2 and 22 |
| Working temperature range | | -40°C ... +90°C [-40°F ... +194°F] ²⁾ |
| Materials | shaft / hollow shaft | stainless steel |
| | flange | aluminium |
| | housing | zinc die-cast housing |
| | cable | PVC |
| Shock resistance acc. EN 60068-2-27 | | 500 m/s ² , 11 ms |
| Vibration resistance acc. EN 60068-2-6 | | 200 m/s ² , 10 ... 150 Hz |

Electrical characteristics

| | | |
|--|---|------------|
| Power supply | 5 V DC ± 5% or 10 ... 30 V DC | |
| Power consumption (no load) | 5 V DC | max. 70 mA |
| | 10 ... 30 V DC | max. 45 mA |
| Reverse polarity protection of the power supply (+V) | yes | |
| UL approval | File 224618 | |
| CE compliant acc. to | EMC guideline 2004/108/EC Machinery directive 2006/42/EC | |
| RoHS compliant acc. to | guideline 2002/95/EC | |

SinCos interface

| | |
|---------------------|---------------------------|
| Max. frequency -3dB | 400 kHz |
| Signal level | 1 V _{pp} (± 10%) |
| Short circuit proof | yes ³⁾ |
| Pulse rate | 1024 / 2048 ppr |

1) The specified value is based on a diagnostic coverage of 90%, that must be achieved with an encoder evaluation unit.
The encoder evaluation unit must meet at least the requirements for SIL2.

2) Cable version: -30°C ... + 90°C [-22°F ... +194°F] fixed installation

3) Short circuit to 0 V or to output, one channel at a time, supply voltage correctly applied.

- 1) The specified value is based on a diagnostic coverage of 90%, that must be achieved with an encoder evaluation unit.
The encoder evaluation unit must meet at least the requirements for SIL2.
- 2) Cable version: -30°C ... +90°C [-22°F ... +194°F] fixed installation
- 3) Short circuit to 0 V or to output, one channel at a time, supply voltage correctly applied

Incremental Encoders

| | | |
|---|--|---------------|
| Standard Sine wave output, SIL2 / PLd, optical | Sendix SIL 5814FS2 / 5834FS2 (Shaft / Hollow shaft) | SinCos |
|---|--|---------------|

Terminal assignment


| Output circuit | Type of connection | Cable (isolate unused wires individually before initial start-up) | | | | | | | |
|----------------|--------------------|---|-----|----|----|-----------|----|-----------|------------------|
| 1, 2 | 1, 2, E | Signal: | 0 V | +V | A | \bar{A} | B | \bar{B} | \perp |
| | | Cable colour: | WH | BN | GN | YE | GY | PK | shield |
| Output circuit | Type of connection | M23 connector, 12-pin | | | | | | | |
| 1, 2 | 3, 4 | Signal: | 0 V | +V | A | \bar{A} | B | \bar{B} | \perp |
| | | Pin: | 10 | 12 | 5 | 6 | 8 | 1 | PH ¹⁾ |
| Output circuit | Type of connection | M12 connector, 8-pin | | | | | | | |
| 1, 2 | 5, 6 | Signal: | 0 V | +V | A | \bar{A} | B | \bar{B} | \perp |
| | | Pin: | 1 | 2 | 3 | 4 | 5 | 6 | PH ¹⁾ |

+V: Encoder power supply +V DC
 0 V: Encoder power supply ground GND (0 V)
 A, \bar{A} : Cosine signal
 B, \bar{B} : Sine signal
 PH \perp : Plug connector housing (Shield)

Top view of mating side, male contact base



M12 connector, 8-pin



M23 connector, 12-pin

1) PH = shield is attached to connector housing

Incremental Encoders

Standard

Sine wave output, SIL2 / PLd, optical

Sendix SIL 5814FS2 / 5834FS2 (Shaft / Hollow shaft)

SinCos

Dimensions shaft version



Dimensions in mm [inch]

Clamping flange, \varnothing 58 [2.28]

Flange type 1 with shaft type 2

(Drawing with cable)

- 1 3 x M3, 6 [0.24] deep
- 2 3 x M4, 8 [0.32] deep
- D = 10 ^{f7} [0.39]

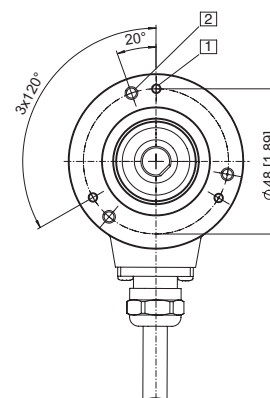
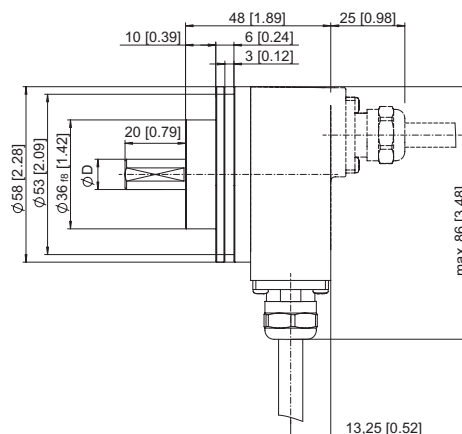


Clamping flange, \varnothing 58 [2.28]

Flange type 1 with shaft type A



(Drawing with M23 connector)

- 1 3 x M3, 6 [0.24] deep
- 2 3 x M4, 8 [0.32] deep
- 3 Feather key DIN 6885 - A - 3x3x6
- D = 10 ^{h7} [0.39]

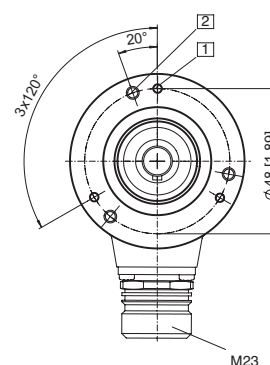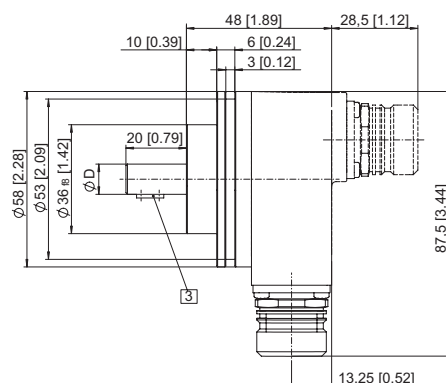

(Drawing with M12 connector)

- 1 3 x M3, 6 [0.24] deep
- 2 3 x M4, 8 [0.32] deep
- 3 Feather key DIN 6885 - A - 3x3x6
- D = 10 mm ^{h7} [0.39]

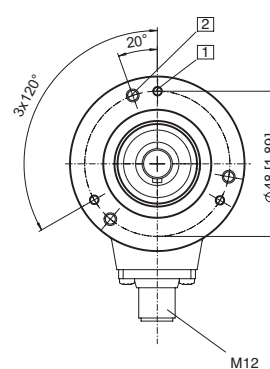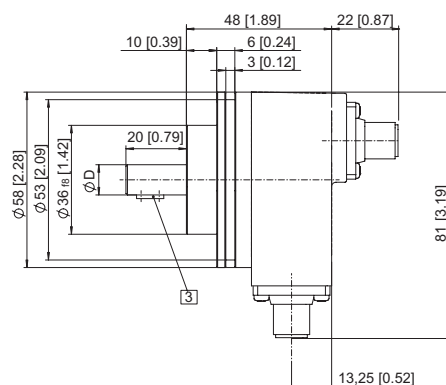

Incremental Encoders

Standard

Sine wave output, SIL2 / PLd, optical

Sendix SIL 5814FS2 / 5834FS2 (Shaft / Hollow shaft)

SinCos

Dimensions hollow shaft version

Dimensions in mm [inch]



Flange with torque stop set

Flange type A

(Drawing with cable)

- 1 SW 3,
recommended torque for the
clamping ring 2.5 Nm



D = \varnothing 10^{H7} [0.39]
 \varnothing 12^{H7} [0.47]
 \varnothing 14^{H7} [0.55]

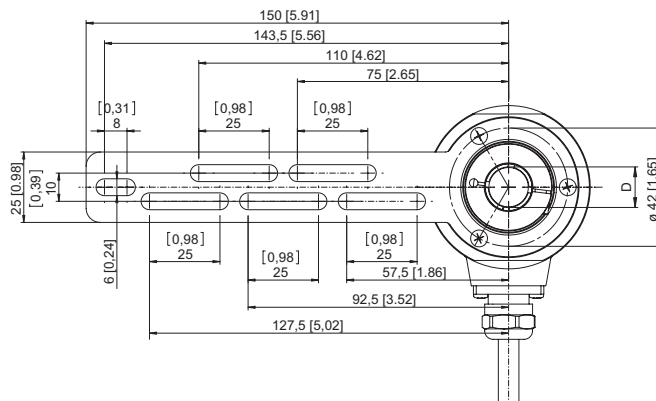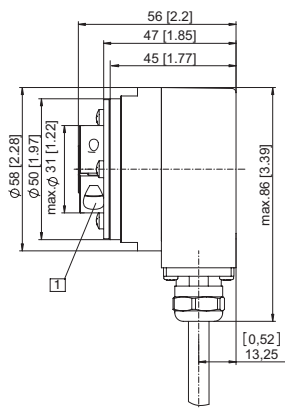


(Drawing with M12 connector)

- 1 SW 3,
recommended torque for the
clamping ring 2.5 Nm

D = \varnothing 10^{H7} [0.39]
 \varnothing 12^{H7} [0.47]
 \varnothing 14^{H7} [0.55]

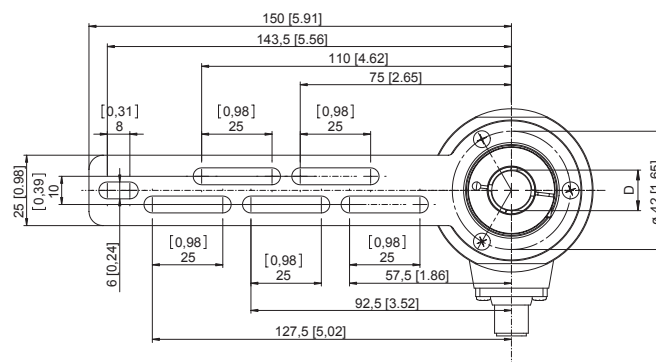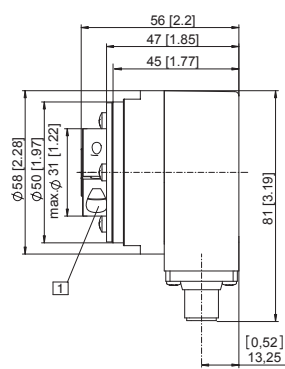

Torque pin with rectangular sleeve
with M4 thread, 10 [0.39] deep

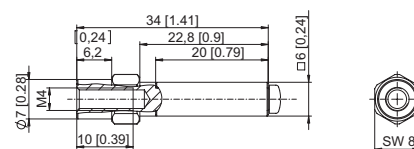

Flange with stator coupling, \varnothing 63 [2.48] and hollow shaft



Flange type B

(Drawing with M23 connector)

- 1 SW 3,
recommended torque for the
clamping ring 2.5 Nm

- 2 for (4x) M3 screw

D = \varnothing 10^{H7} [0.39]
 \varnothing 12^{H7} [0.47]
 \varnothing 14^{H7} [0.55]

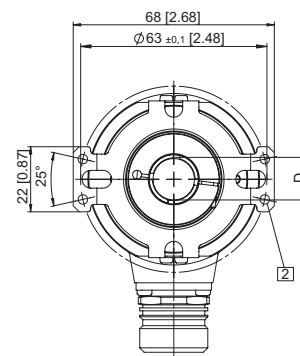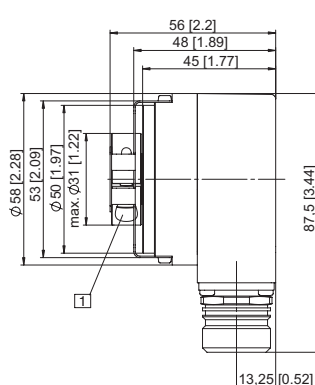

Flange with stator coupling, \varnothing 63 [2.48] and tapered shaft

Flange type B

(Drawing with tangential cable outlet)

- 1 for (4x) M3 screw

- 2 Status LED

- 3 SET button

- 4 SW 4

