


Absolute Encoders - Singleturn

Standard
SIL3/PLe, optical

Sendix SIL 5853FS3 / 5873FS3 (Shaft / Hollow shaft)

SSI/BiSS-C + SinCos

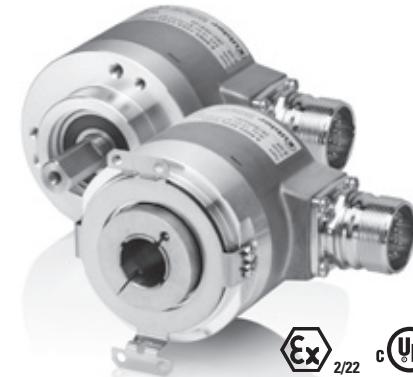

SIL3
Functional Safety
PLe




The absolute singleturn encoders 5853FS3 and 5873FS3 of the Sendix SIL family are suited for use in safety-related applications up to SIL3 according to EN 61800-5-2 or PLe to EN ISO 13849-1.

The extra strong Safety-Lock™ Design interlocked bearings, the high integration density of the components based on OptoASIC technology and the rugged die-cast housing make these devices ideal also for demanding applications outdoors up to IP67.



ssi **BiSS**
INTERFACE

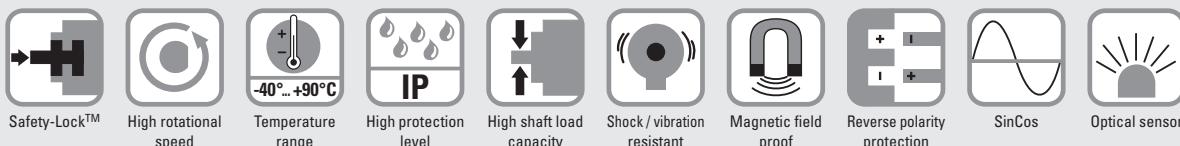

Functional Safety

- Encoder with individual certificate from IFA / TÜV
- Suitable for applications up to SIL3 acc. to EN 61800-5-2
- Suitable for applications up to PLe acc. to EN ISO 13849-1
- SSI or BiSS-C interface with incremental SinCos tracks with 2048 ppr
- Certified mechanical mounting + electronic

Flexible

- Shaft and hollow shaft versions
- Cable and connector variants
- Various mounting options available

Order code
Shaft version

8.5853FS3 . 1|X|X|X . X|X|2|X
Type a|b|c|d e|f|g|h

If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces.
Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.

10 by 10

a Flange
1 = clamping flange, IP65, ø 58 mm [2.28"]

d Type of connection

1 = axial cable, 1 m [3.28'] PVC

h Options (Service)

1 = no option

b Shaft (ø x L)
2 = 10 x 20 mm [0.39 x 0.79"], with flat
A = 10 x 20 mm [0.39 x 0.79"], with feather key

2 = radial cable, 1 m [3.28'] PVC
3 = M23 connector, 12 pin, axial
4 = M23 connector, 12 pin, radial

i Resolution ¹⁾

A = 10 bit ST

2 = Status LED
3 = SET button and status LED

c Interface / Power supply
3 = SSI or BiSS-C + 2048 ppr SinCos / 5 V DC
4 = SSI or BiSS-C + 2048 ppr SinCos / 10 ... 30 V DC

e Code

B = SSI, Binary
C = BiSS-C, Binary
G = SSI, Gray

g Input / output ¹⁾
2 = SET, DIR input

optional on request

- special cable length
- Ex 2/22

Order code
Hollow shaft

8.5873FS3 . X|X|X|X . X|X|2|X
Type a|b|c|d e|f|g|h

If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces.
Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.

10 by 10

a Flange
A = with torque stop set, IP65
B = with stator coupling, IP65, ø 63 mm [2.48"]

d Type of connection

2 = radial cable, 1 m [3.28'] PVC
E = tangential cable, 1 m [3.28'] PVC
4 = M23 connector, 12 pin, radial

i

Resolution ¹⁾
A = 10 bit ST

h Options (Service)

1 = no option
2 = Status LED

b Hollow shaft
3 = ø 10 mm [0.39"]
4 = ø 12 mm [0.47"]
5 = ø 14 mm [0.55"]
K = ø 10 mm [0.39"], tapered shaft

e Code

B = SSI, Binary
C = BiSS-C, Binary
G = SSI, Gray

g Input / output ¹⁾
2 = SET, DIR input

optional on request

- special cable length
- Ex 2/22

c Interface / Power supply
3 = SSI or BiSS-C + 2048 ppr SinCos / 5 V DC
4 = SSI or BiSS-C + 2048 ppr SinCos / 10 ... 30 V DC

1) Resolution, preset value and count direction are factory-programmable

Absolute Encoders - Singleturn

Standard SIL3/PLe, optical	Sendix SIL 5853FS3 / 5873FS3 (Shaft / Hollow shaft)	SSI/BiSS-C + SinCos
Accessory safety technology		Order No.
Safety-M, basic modules	speed / position monitoring for 1 axis speed / position monitoring for 2 axes (analogue inputs optional)	8.MSP1.000 8.MSP2.XXX
Connection technology		
Connector, self-assembly (straight)	M23 female connector with coupling M23 female connector with coupling, Ex zone 2/22	8.0000.5012.0000 8.0000.5012.0000.Ex
Cordset, pre-assembled	M23 female connector with coupling nut, 2 m [2.19'] PVC cable	8.0000.6901.0002.0031

Further accessories can be found in the accessories section or in the accessories area of our website at: www.kuebler.com/accessories
 Additional connectors can be found in the connection technology section or in the connection technology area of our website at: www.kuebler.com/connection_technology
 You will find an overview of our systems and components for functional safety under www.kuebler.com/safety

Technical data

Notes regarding "Functional Safety"		
These encoders are suitable for use in safety-related systems up to SIL3 acc. to EN 61800-5-2 and PLe to EN ISO 13849-1 in conjunction with controllers or evaluation units, which possess the necessary functionality.		
Additional functions can be found in the operating manual.		
Safety characteristics	Electrical characteristics	
Relevant standards	EN ISO 13849-1 / EN 61800-5-2, EN 61508	Power supply 5 V DC ± 5% or 10 ... 30 V DC
Classification	PLe / SIL3	Current consumption (no load) 5 V DC 10 ... 30 V DC max. 70 mA max. 45 mA
System structure	2 channel (Cat. 4 / HFT = 1)	Reverse polarity protection of the power supply (+V) yes
PFH _d value ¹⁾	1.09 x 10 ⁻⁸ h ⁻¹	Short circuit proof outputs yes ³⁾
Proof-test interval	20 years	UL approval File 224618
CE compliant acc. to EMC guideline 2004/108/EC Machinery directive 2006/42/EC		
RoHS compliant acc. to guideline 2002/95/EC		

Mechanical characteristics		
Max. speed, shaft version		
up to 70°C [158°F]	12 000 min ⁻¹ , 10 000 min ⁻¹ (continuous)	
up to T _{max}	8 000 min ⁻¹ , 5 000 min ⁻¹ (continuous)	
Max. speed, hollow shaft version		
up to 70°C [158°F]	9 000 min ⁻¹ , 6 000 min ⁻¹ (continuous)	
up to T _{max}	6 000 min ⁻¹ , 3 000 min ⁻¹ (continuous)	
Starting torque - at 20°C [68°F]		
shaft version	< 0.01 Nm	
hollow shaft version	< 0.03 Nm	
Moment of inertia		
shaft version	4.0 x 10 ⁻⁶ kgm ²	
hollow shaft version	7.0 x 10 ⁻⁶ kgm ²	
Load capacity of shaft	radial	80 N
	axial	40 N
Weight	approx. 0.45 kg [15.87 oz]	
Protection acc. to EN 60529		
housing side	IP67	
shaft side	IP65	
Working temperature range	-40°C ... +90°C ²⁾ [-40°F ... +194°F] ²⁾	
Material	shaft / hollow shaft	stainless steel
	flange	aluminium
	housing	zinc die-cast housing
	cable	PVC
Shock resistance acc. EN 60068-2-27	500 m/s ² , 11 ms	
Vibration resistance acc. EN 60068-2-6	200 m/s ² , 10 ... 150 Hz	

1) The specified value is based on a diagnostic coverage of 99%, that must be achieved with an encoder evaluation unit.

The encoder evaluation unit must meet at least the requirements for SIL3.

2) Cable version: -30 °C ... +90°C [-22°F ... +194°F]

3) Short circuit to 0 V or to output, one channel at a time, power supply correctly applied

Absolute Encoders - Singleturn

Standard
SIL3/PLe, optical

Sendix SIL 5853FS3 / 5873FS3 (Shaft / Hollow shaft)

SSI/BiSS-C+SinCos

SSI interface

Output driver	RS485 transceiver type	
Permissible load / channel	max. 20 mA	
Signal level	HIGH	typ 3.8 V
	LOW at $I_{Load} = 20$ mA	typ 1.3 V
Singleturn resolution	10 ... 14 bit and 17 bit ¹⁾	
Code	Binary or gray	
SSI clock rate	resolution ≤ 14 bit	50 kHz ... 2 MHz
	resolution ≥ 15 bit	50 kHz ... 125 kHz
Monoflop time	≤ 15 µs	
Note: If the clock starts cycling within the monoflop time, a second data transfer starts with the same data. If the clock starts cycling after the monoflop time, the data transfer starts with the new values. The update rate is dependent on the clock speed, data length and monoflop-time.		
Data refresh rate	resolution ≤ 14 bit	≤ 1 µs
	resolution ≥ 15 bit	4 µs
Status and parity bit	on request	

BiSS-C interface

Resolution singleturn	10 ... 14 bit and 17 bit ¹⁾	
Code	Binary	
Clock rate	up to 10 MHz	
Max. update rate	< 10 µs, depends on the clock rate and the data length	
Data refresh rate	≤ 1 µs	
Note:	<ul style="list-style-type: none"> - Bidirectional, factory programmable parameters are: resolution, code, direction, alarms and warnings - CRC data verification 	

SinCos interface

Max. frequency -3dB	400 kHz	
Signal level	1 Vpp (± 10%)	
Short circuit proof	yes	
Pulse rate	2048 ppr	

SET input or SET button

Input	active HIGH
Input type	comparator
Signal level	HIGH min: 60 % of +V, max: +V LOW max: 25 % of +V (Power supply)
Input current	< 0.5 mA
Min. pulse duration (SET)	10 ms
Timeout after SET signal	14 ms
Reaction time (DIR input)	1 ms

The encoder can be set to zero at any position by means of a HIGH signal on the SET input or by pressing the optional SET button (with a pencil, ball-point pen or similar). Other preset values can be factory-programmed. The SET input has a signal delay time of approx. 1 ms. Once the SET function has been triggered, the encoder requires an internal processing time of approx. 15 ms before the new position data can be read. During this time the LED is ON.

DIR input

A HIGH signal switches the direction of rotation from the default CW to CCW. This function can also be factory-programmed to be inverted. If DIR is changed when the device is already switched on, then this will be interpreted as an error. The LED will come ON and the status output will switch to LOW.

Power-on delay

After Power-ON the encoder requires a time of approx. 150 ms before valid data can be read.

LED

The optional LED (red) serves to display various alarm or error messages. In normal operation the LED is OFF.

If the LED is ON this indicates:

- Sensor error, singleturn or multiturn (soiling, glass breakage etc.)
- LED error, failure or ageing
- Over- or under-temperature

In the SSI mode, the fault indication can only be reset by switching off the power supply to the device.

Terminal assignment

Interface	Type of connection	Cable (isolate unused wires individually before initial start-up)													
3, 4	1, 2, E	Signal:	0 V	+V	C+	C-	D+	D-	SET	DIR	A	Ā	B	Ā	÷
		Cable colour:	WH	BN	GN	YE	GY	PK	BU	RD	BK	VT	GY-PK	RD-BU	shield
Interface	Type of connection	M23 connector, 12-pin													
3, 4	3, 4	Signal:	0 V	+V	C+	C-	D+	D-	SET	DIR	A	Ā	B	Ā	÷
		Pin:	1	2	3	4	5	6	7	8	9	10	11	12	PH

+V: Encoder power supply +V DC
0 V: Encoder power supply ground GND (0 V)

C+, C-: Clock signal

D+, D-: Data signal

SET: Set input. The current position becomes defined as position zero.


DIR: Direction input: If this input is active, output values are counted backwards (decrease) when the shaft is turning clockwise.

A, Ā: cosine signal

B, Ā: sine signal

PH ÷: Plug connector housing (shield)

Top view of mating side, male contact base



M23 connector, 12-pin

1) Other options on request

Absolute Encoders - Singleturn

Standard
SIL3/PLe, optical

Sendix SIL 5853FS3 / 5873FS3 (Shaft / Hollow shaft)

SSI/BiSS-C + SinCos

Dimensions shaft version


Dimensions in mm [inch]

Clamping flange, ø 58 [2.28]

Flange type 1 with shaft type 2
(Drawing with cable)

- [1] 3 x M3, 6 [0.24] deep
- [2] 3 x M4, 8 [0.32] deep

D = 10^{h7} [0.39]

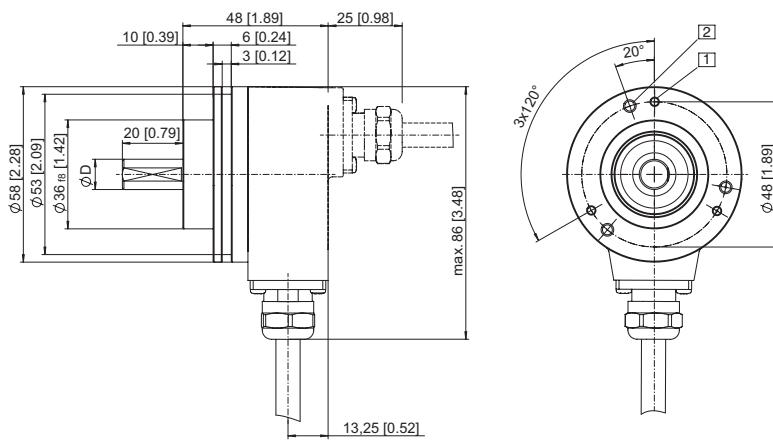


Clamping flange, ø 58 [2.28]

Flange type 1 with shaft type A
(Drawing with M23 connector)

- [1] 3 x M3, 6 [0.24] deep
- [2] 3 x M4, 8 [0.32] deep
- [3] Feather key DIN 6885 - A - 3x3x6

D = 10^{h7} [0.39]

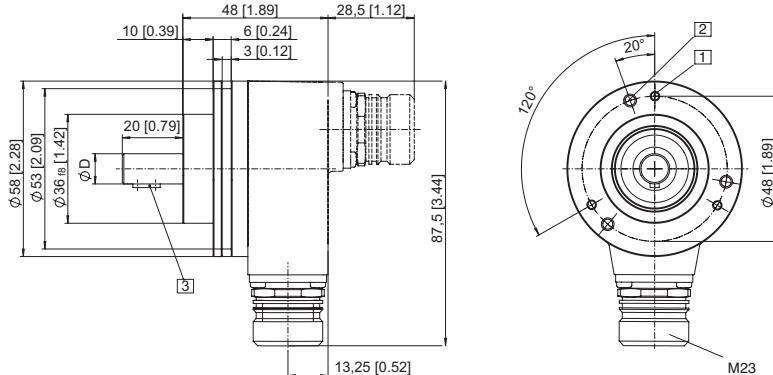

Absolute Encoders - Singleturn

Standard
SIL3/PLe, optical

Sendix SIL 5853FS3 / 5873FS3 (Shaft / Hollow shaft)

SSI/BiSS-C + SinCos

Dimensions hollow shaft version

Dimensions in mm [inch]



Flange with torque stop set

Flange type A


(Drawing with cable)

1 SW 3, recommended torque for the clamping ring 2.5 Nm

$D = \varnothing 10^{H7}$ [0.39]
 $\varnothing 12^{H7}$ [0.47]
 $\varnothing 14^{H7}$ [0.55]

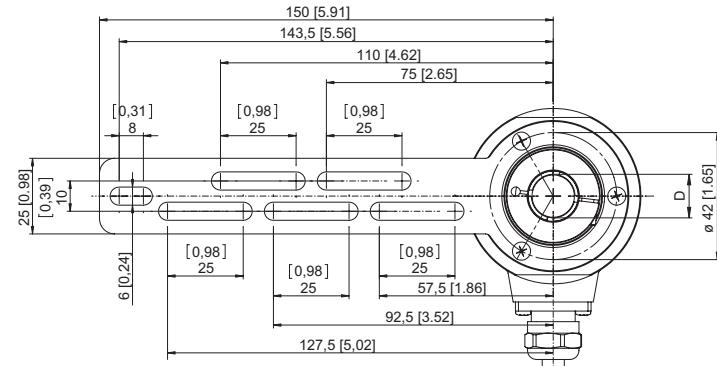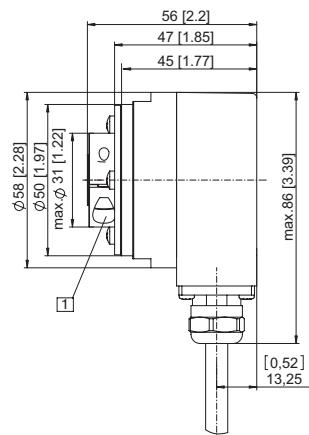

Torque pin with rectangular sleeve with M4 thread, 10 [0.39] deep

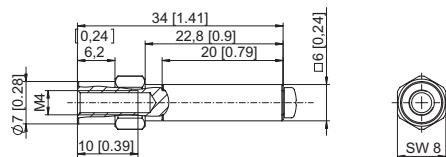

Flange with stator coupling, $\varnothing 63$ [2.48] and hollow shaft



Flange type B

(Drawing with M23 connector)

1 SW 3, recommended torque for the clamping ring 2.5 Nm

2 for (4x) M3 screw

$D = \varnothing 10^{H7}$ [0.39]
 $\varnothing 12^{H7}$ [0.47]
 $\varnothing 14^{H7}$ [0.55]

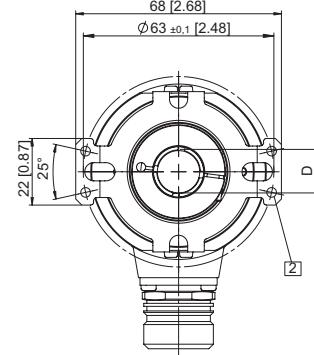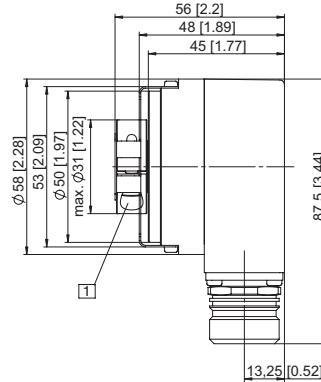

Flange with stator coupling, $\varnothing 63$ [2.48] and tapered shaft

Flange type B

(Drawing with tangential cable outlet)

1 for (4x) M3 screw

2 Status LED

3 SET button

4 SW 4

